



BENTLEY

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Unit Illustrated: Model ZCV39NHE2 Zero Clearance Direct Vent Gas Fireplace Natural Gas, MQLOGF9 Log Set, ZCV39RLH Herringbone Brick Liner, MQ39DD2BL Designer Door (Series 2) Black c/w Safety Screen.

 marquis
FIREPLACE COLLECTION

Bring the BIG VIEW INDOORS

With an expansive glass viewing area and clever designer options for customizing the look to suit your personal style, the **Bentley** by Marquis is generating some serious attention.

Available in a range of sizes and styles, you can choose from our mid efficient rated fireplace for ambiance and taking the chill out of the room, or higher efficient version for additional warmth.

With so much style and attention to detail, it's no wonder people are focused on the view indoors!

Visit marquisfireplaces.net to see the latest evolution in fireplaces.



BENTLEY

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier
- Proflame II (PF2) Models include Remote Control: features flame, fan, thermostat, smart thermostat (WIFI Compatibility*); Bentley 34/48 (P2) models include accent lighting

* Smartphone (local WiFi only)

OPTIONAL FEATURES

Fan Kit:

Heat activated with variable speed control



Designer Doors:

Arch, Straight Black (2 options) – Bentley 39/42/48 only

Surrounds:

Hearth Mount, Picture Frame, or Slim Line Picture Frame

Liners:

Porcelain Reflective, Fluted or Brick

Media Options:

Contemporary Rocks, Driftwood Set (2 options), Decorative Stones, Decorative Ember Glass (Glacier Ice, Cobalt Blue, Black, Bronze, White), Ember Chunks or Multi-Colored Cannonballs

Log Sets:

Choose from a selection of Oak, Birch, or Driftwood Log Sets

Accent Lighting:

For use with the Glass Tray – Bentley 39/42 models only (Dealer Installed Item)

Remote Controls (Millivolt or IPI PF1):

Thermostat on/off, thermostat on/off modulating, thermostat on/off modulating and fan control



Thermostats:

Wall mount or programmable

Vented Chase:

Front grill or side grills

Wall Mount Battery Holder (WMBH):

The battery holder provides power to the IPI system in case of power failures. Locating the battery holder outside of the fireplace (wall mount), provides a convenient and accessible location for battery installation and removal.



Find all
detailed
Bentley
manuals:



Unit Illustrated: Model ZCV39NHE Zero Clearance Direct Vent Gas Fireplace Natural Gas, MQLOGF39BW Birch Wood Log Set, ZCV39PL Porcelain Reflective Liner, ZCV39S1PFBL Surround (Picture Frame 4" Wide).




COOL TOUCH WALL TECHNOLOGY OPTIONS

The chase of the appliance may be vented to achieve Cool Touch Walls or reduced Mantel Clearances.


Benefits to Cool Touch Wall Technology :

- Wall above fireplace will be cooler, useful when installing TV's or Artwork above fireplace.
- In some instances combustible materials can be used to cover the face of the fireplace (please consult installation manual).
- Mantel height is lower than Non-Vented Chase.
- Chase must be vented at the top with a specified grill or opening size.
- If the chase bumps out into the room, side grills can be installed on each side of the chase.

FRAMED COOL TOUCH WALL TECHNOLOGY*

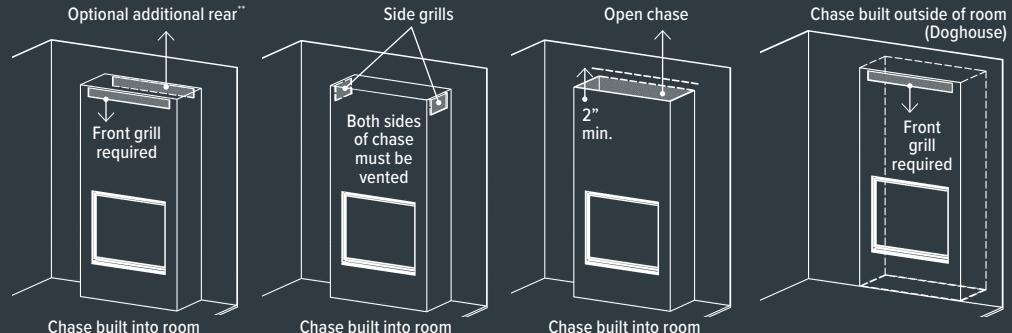

RECESSED COOL TOUCH WALL TECHNOLOGY OPTION*

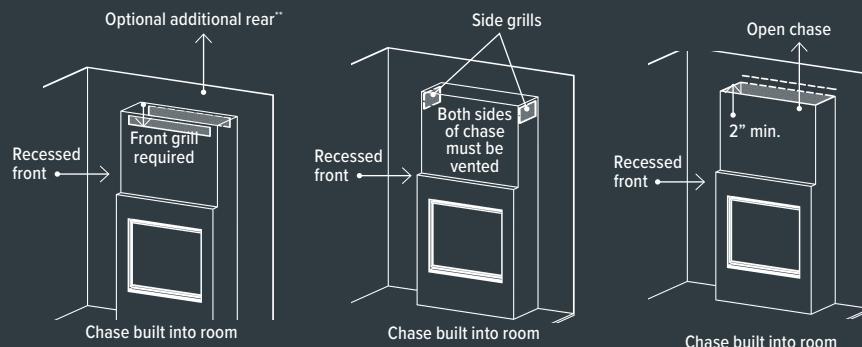

* NOTE: Ventilation Plates are removed from fireplace before it is installed into a Vented Chase.

** Consult manual for further information.

Minimum enclosure height for a vented chase is measured from bottom of fireplace, ventilation of minimum free air opening is required. Choose between our Enclosure Grills (Front or Sides) for adequate ventilation opening as stated in the manual. Grill or opening must meet minimum (as specified in the installation manual) of chase top/ceiling.

ZCV34 ZCV39 ZCV42 ZCV48

MINIMUM ENCLOSURE HEIGHTS

| | | | | |
|-------------------------------------|-----|-----|-----|-----|
| Min. Enclosure Height (Natural Gas) | 68" | 72" | 72" | 72" |
| Min. Enclosure Height (Propane) | 68" | 72" | 72" | 80" |

WITH OPENINGS (NO GRILLS) – Minimum of 2" opening on all three sides of chase from ceiling


WITH GRILLS (MIN. AIR FREE OPENINGS)

| | | | | |
|---|--------------------|------------------|------------------|------------------|
| Minimum Front Grill Opening | 31 3/8" x 3 1/4" | 36 1/2" x 3 5/8" | 36 1/2" x 3 5/8" | 48 1/2" x 4 7/8" |
| Minimum Grill Opening (Two Side Grills) | 10 1/4" x 4 13/16" | 12 1/2" x 6 1/8" | 12 1/2" x 6 1/8" | 15 1/4" x 6 5/8" |
| Grill Opening (Max. distance from top of enclosure) | 3/4" | 3/4" | 3/4" | 3/4" |
| Front Grill Part Number | V34EG | V39EG | V39EG | V49EG |
| Side Grills Part Number | V34EGS | V39EGS | V39EGS | VL60EGS |

BENTLEY 34



BENTLEY 34 PRODUCT DIMENSIONS

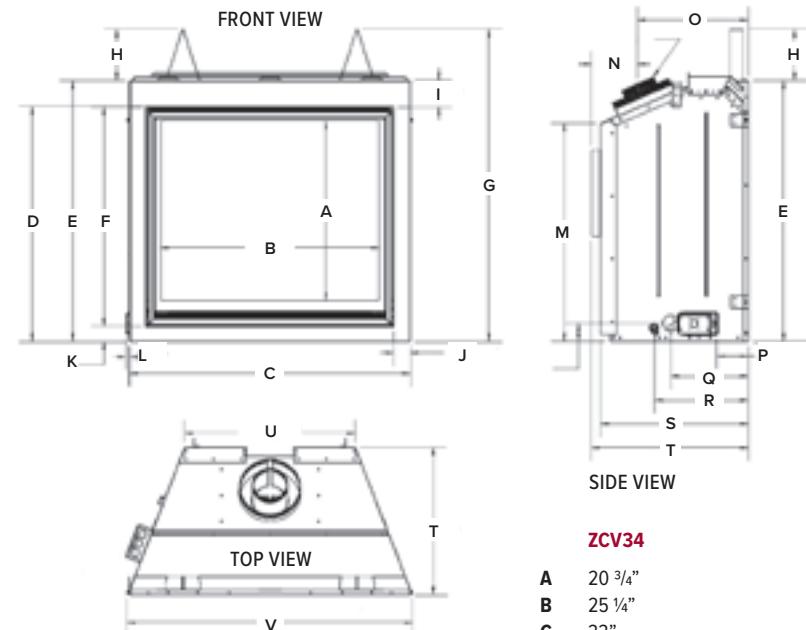

FRAMING DIMENSIONS

ZCV34

HEIGHT

Actual 36"
Framing 36 1/8"

FRONT WIDTH

Actual 33"
Framing 33 1/4"

DEPTH

Actual 18 1/16"
Framing 18 1/8"**

** Dependent of finishing material used

ZCV34

| | |
|---|-----------|
| A | 20 3/4" |
| B | 25 1/4" |
| C | 33" |
| D | 27 1/8" |
| E | 30 1/8" |
| F | 25 5/16" |
| G | 36" |
| H | 5 7/8" |
| I | 3 1/16" |
| J | 1 15/16" |
| K | 1 3/4" |
| L | 7/16" |
| M | 25 3/16" |
| N | 5 1/4" |
| O | 12 13/16" |
| P | 3 1/16" |
| Q | 8 5/16" |
| R | 10 13/16" |
| S | 17 1/16" |
| T | 18 1/16" |
| U | 19 1/16" |
| V | 33" |

SURROUNDS

| | HEARTH MOUNT (3" WIDE) | PICTURE FRAME (4" WIDE) | PICTURE FRAME (1 1/16" WIDE) |
|-------|------------------------------------|------------------------------------|-------------------------------------|
| ZCV34 | ZCV34S1BL 34 7/8" W x 30 3/4" H | ZCV34S1PF 36 5/8" W x 33 3/8" H | ZCV34S2PF 31 1/16" W x 28 3/4" H |

Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, ZCV34RLH Herringbone Brick Liner, MQLOGF340AK Oak Log Set.



Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF34BW Birch Log Set, ZCV34RLT Traditional Brick Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQRBD3 Driftwood Log Set, ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOG453 Driftwood Log Set, ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQG5B Glass Media (Black, 5 lbs x 2 Bags), ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQROCK3 Multi-Colored Rock Set, ZCV34PL Porcelain Reflective Liner.

BENTLEY 34 PRODUCT SPECIFICATIONS

| | | | | |
|-------------------------|--|--|--|--|
| MODEL | ZCV34N | ZCV34LP | ZCV34NH | ZCV34LPH |
| | ZCV34NE | ZCV34LPE | ZCV34NHE | ZCV34LPHE |
| | ZCV34NE2 | ZCV34LPE2 | ZCV34NHE2 | ZCV34LPHE2 |
| Fuel | Natural Gas | Propane | Natural Gas | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 19,000 BTU | 18,000 BTU | 19,000 BTU | 18,000 BTU |
| Input Min. | 13,500 BTU | 14,000 BTU | 13,500 BTU | 14,000 BTU |
| FE (P.4.1-15) | 53.49% / 56.14% | 58.67% / 61.17% | 63.25% / 66.45% | 66.38% / 69.25% |
| Viewing Area | 28 5/8" W x 25 3/8" H |
| Venting | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent |
| Cool Touch Walls | Vented Chase Option** | Vented Chase Option** | Vented Chase Option** | Vented Chase Option** |

* Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.

** See Installation Manual for Vented Chase Option.



Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQSTONE Decorative Stones, ZCV34PL Porcelain Reflective Liner.

BENTLEY 39/42



BENTLEY 39 PRODUCT SPECIFICATIONS

| | | | | |
|----------------------|--|--|--|--|
| MODEL | ZCV39N ZCV39NE ZCV39NE2 | ZCV39LP ZCV39LPE ZCV39LPE2 | ZCV39NH ZCV39NHE ZCV39NHE2 | ZCV39LPH ZCV39LPHE ZCV39LPHE2 |
| Fuel | Natural Gas | Propane | Natural Gas | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 25,000 BTU | 25,000 BTU | 28,000 BTU | 29,000 BTU |
| Input Min. | 16,750 BTU | 20,000 BTU | 19,000 BTU | 23,000 BTU |
| FE (P.4.1-15) | 52.35% / 52.24% | 52.35% / 54.24% | 63.81% / 66.17% | 66.82% / 68.65% |
| Viewing Area | 33" W x 28 5/8" H |
| Venting | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent |

*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.



ZCV39NE, MQLOGF9 Log Set, ZCV39RLS
Stacked Brick Liner, MQ39DD2BL Designer
Door (Series 2, Black).

ZCV39NE, MQLOGF9 Log Set, ZCV39RLT
Traditional Brick Liner, MQ39DD3BL Designer
Door (Series 3, Black).

ZCV39NE, LOGF3 Log Set, ZCV39RLH
Herringbone Brick Liner, MQ39DD1BL
Designer Door (Series 1, Black).



ZCV39NE, ZCV39GT Glass Tray, MQSTONE
Decorative Stones, ZCV39PL Porcelain
Reflective Panel Liner.


ZCV39NE, ZCV39GT Glass Tray, MQ39D
Driftwood Log Set, MQSTONE Decorative
Stones, ZCV39PL Porcelain Reflective
Panel Liner.

ZCV39NE, ZCV39GT Glass Tray, MQROCK3
Contemporary Rock Collection (Multi-Colored),
ZCV39PL Porcelain Reflective Panel Liner.

Unit Illustrated: Model ZCV39NE Zero Clearance Direct Vent Gas Fireplace
Natural Gas, ZCV39GT Glass Tray, MQG5ZG ZIRCON Glacier Ice Glass Media
(5 lbs. x 3 Bags), ULK2 Universal Light Kit (2 Lamps), ZCV39PL Porcelain
Reflective Liner, ZCV39S2PFBL Surround (Picture Frame 1-5/8" Wide).

BENTLEY 39/42 PRODUCT DIMENSIONS


SIDE VIEW

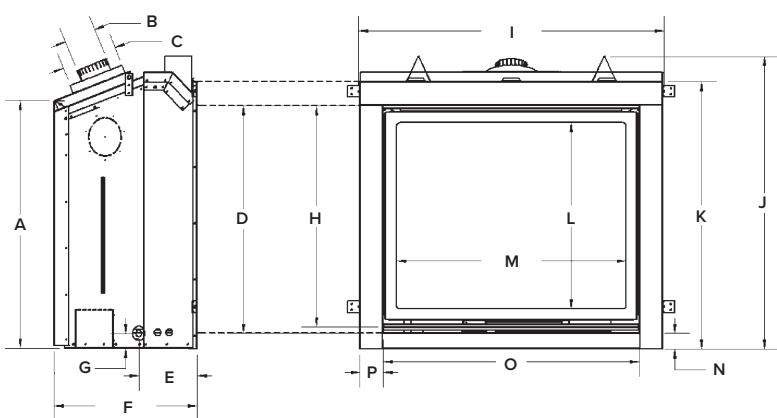

ZCV39

| | | |
|----------|----------|----------|
| A | 32" | 35 1/8" |
| B | 4" | 4" |
| C | 7" | 7" |
| D | 29 3/8" | 32 1/2" |
| E | 7 1/2" | 7 5/16" |
| F | 18 7/16" | 18 7/16" |
| G | 1 15/16" | 1 15/16" |
| H | 28 1/16" | 31 1/16" |
| I | 39 3/8" | 42 7/16" |
| J | 37 1/16" | 40 7/8" |
| K | 34 1/2" | 37 5/8" |
| L | 24 1/16" | 27 3/16" |
| M | 29 5/8" | 33 1/16" |
| N | 2" | 2" |
| O | 33" | 37 1/16" |
| P | 3" | 2 1/2" |
| Q | 24 1/4" | 27 7/8" |
| R | 18 7/16" | 18 7/16" |
| S | 6 7/8" | 6 7/8" |
| T | 39 3/8" | 42 7/16" |

FRONT VIEW

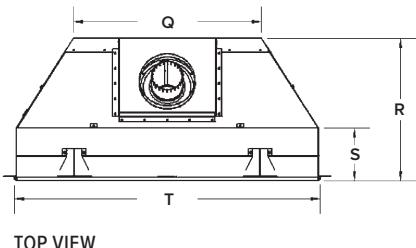

FRAMING DIMENSIONS

ZCV39 **ZCV42**

HEIGHT

| | | |
|---------|----------|---------|
| Actual | 37 1/16" | 40 7/8" |
| Framing | 37 7/8" | 41" |

FRONT WIDTH

| | | |
|---------|---------|----------|
| Actual | 39 3/8" | 42 7/16" |
| Framing | 39 1/2" | 42 1/2" |

DEPTH

| | | |
|---------|-----------|-----------|
| Actual | 18 7/16" | 18 7/16" |
| Framing | 18 1/2"** | 18 1/2"** |

**Dependent of finishing material used

SURROUNDS

HEARTH MOUNT (4" WIDE)

ZCV39

ZCV39S1BL

40 5/8" W x 35" H

PICTURE FRAME (4" WIDE)

ZCV39S1PFBL

40 5/8" W x 37" H

36 1/8" W x 32 1/2" H

PICTURE FRAME (1 5/8" WIDE)

ZCV39S2PFBL

40 3/16" W x 35 5/8" H

HEARTH MOUNT (4" WIDE)

ZCV42

ZCV42S1BL

44 1/16" W x 38 1/8" H

PICTURE FRAME (4" WIDE)

ZCV42S1PFBL

44 1/16" W x 40 1/8" H

40 3/16" W x 35 5/8" H

BENTLEY 42 PRODUCT SPECIFICATIONS

| MODEL | ZCV42N | ZCV42LP | ZCV42NH | ZCV42LPH |
|----------------------|--|--|--|--|
| Fuel | Natural Gas | Propane | Natural Gas | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 25,000 BTU | 25,000 BTU | 29,500 BTU | 29,000 BTU |
| Input Min. | 16,500 BTU | 19,500 BTU | 20,000 BTU | 23,000 BTU |
| FE (P.4.1-15) | 52.86% / 54.95% | 52.86% / 54.95% | 64.53% / 66.48% | 66.65% / 68.77% |
| Viewing Area | 37 1/8" W x 31 3/4" H |
| Venting | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent | 4" / 7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent |

*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.

Unit Illustrated: ZCV42NE2, MQ42D Driftwood Log Set, ZCV42GT Glass Tray, ZCV42PL Porcelain Reflective Liner, ZCV42S1BL Surround (Hearth Mount 4" Wide).



BENTLEY 48

Go **BIG**

When the view is this big, it must be the Bentley 48. This big brother of the popular Bentley by Marquis is getting some serious attention and lots of second looks from home owners wanting to enjoy a statement fireplace. An expansive glass viewing area and beautiful designer options allow you to customize the look to your own style. Take the chill out of the room with this heater-rated fireplace, and bask in some serious warmth.

Wow – we made you look, didn't we?


Visit www.marquisfireplaces.net to see the latest evolution in fireplaces.




Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48B Burnt Oak Log Set, ZCV48RLH Herringbone Brick Liner.

BENTLEY 48 PRODUCT DIMENSIONS

SIDE VIEW

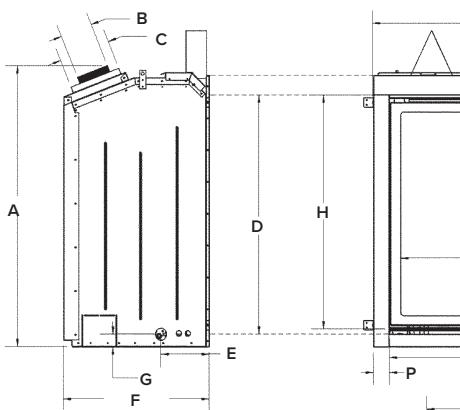

FRONT VIEW

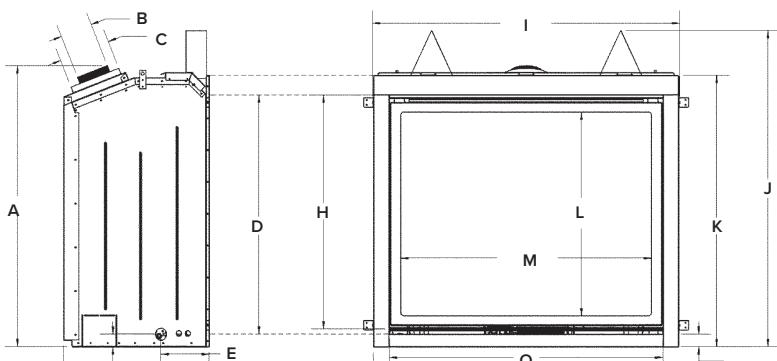

ZCV48

| | |
|---|-----------|
| A | 44 1/8" |
| B | 5" |
| C | 8" |
| D | 37 1/16" |
| E | 7 5/8" |
| F | 22 15/16" |
| G | 1 15/16" |

| | |
|---|-----------|
| H | 36 3/4" |
| I | 48 3/8" |
| J | 49 11/16" |
| K | 42 11/16" |
| L | 32" |
| M | 39 7/16" |
| N | 2" |
| O | 43" |
| P | 2 1/2" |
| Q | 31 5/16" |
| R | 23" |
| S | 48 3/8" |

FRAMING DIMENSIONS

ZCV48

HEIGHT

| | |
|---------|-----------|
| Actual | 49 11/16" |
| Framing | 49 3/4" |

FRONT WIDTH

| | |
|---------|---------|
| Actual | 48 3/8" |
| Framing | 48 1/2" |

DEPTH

| | |
|---------|------------|
| Actual | 22 15/16" |
| Framing | 24 9/16"** |

**Dependent of finishing material used

SURROUNDS

HEARTH MOUNT (4" WIDE)

ZCV48 ZCV48S1BL

50 1/16" W x 43 3/16" H

BENTLEY 48 PRODUCT SPECIFICATIONS

| MODEL | MQZCV48N | MQZCV48LP | MQZCV48NE | MQZCV48LPE |
|----------------------|----------------------|----------------------|----------------------|----------------------|
| | MQZCV48NE2 | MQZCV48LPE2 | | |
| Fuel | Natural Gas | Propane | Natural Gas | Propane |
| Gas Control | Millivolt | Millivolt | IPI | IPI |
| Input Max. | 42,500 BTU | 42,250 BTU | 42,500 BTU | 42,250 BTU |
| Input Min. | 28,500 BTU | 34,000 BTU | 28,500 BTU | 34,000 BTU |
| FE (P.4.1-15) | 52.24% | 54.52% | 53.37% | 55.71% |
| Viewing Area | 43" W x 36 3/4" H |
| Venting | 5/8" * or Power Vent |

*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.



Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF39BW Birch Log Set, with MQBBITS Birch Log Bit Kit, ZCV48RLS Stacked Brick Liner.



ACCESSORIES

LOG SETS



MQRBD3 Driftwood Set
BENTLEY 34



MQRBRW Birch Set
BENTLEY 34



MQLOGF34OAK Oak Set
BENTLEY 34



MQLOGF34BW Birch Set
BENTLEY 34



MQLOGF453 Driftwood Set
BENTLEY 34



LOGC44 Burnt Oak Set
BENTLEY 34



MQLOGF9 Split Oak Set
BENTLEY 39 / 42



LOGF3 Split Oak Set
BENTLEY 39 / 42




MQ39D Driftwood Set
(Glass Tray Required) BENTLEY 39 / 42



MQLOGF39BW Birch Set
BENTLEY 39 / 42 / 48



MQ42D Driftwood Log Set
(Glass Tray Required) BENTLEY 39 / 42

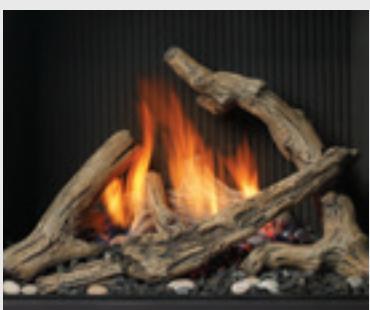

MQLOGF48D Driftwood Set
(Glass Tray Required) BENTLEY 48



MQLOGF48 Split Oak Set
BENTLEY 48



MQLOGF48B Burnt Oak Set
BENTLEY 48

ROCK AND GLASS SETS (TRAY REQUIRED)



MQG5ZG Zircon Glacier Ice Glass



MQG5A Cobalt Ember Glass




MQG5B Black Ember Glass

LINERS



RLT Traditional Brick

BENTLEY 34 / 39 / 42 / 48

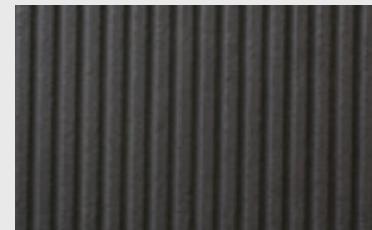

RLF Fluted

BENTLEY 39 / 42 / 48



MQG5C Bronze Ember Glass



MQG5W White Ember Glass




MQEMBER Ember Chunks



RLS Stacked Brick

BENTLEY 39 / 42 / 48

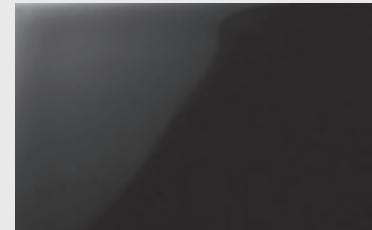

PL Porcelain Reflective

BENTLEY 34 / 39 / 42 / 48



MQSTONE Decorative Stones



MQROCK2 Natural Rock Set




RBCB1 Multi-Colored Cannonballs




RLH Herringbone Brick

BENTLEY 34 / 39 / 42 / 48


WALL SURROUND

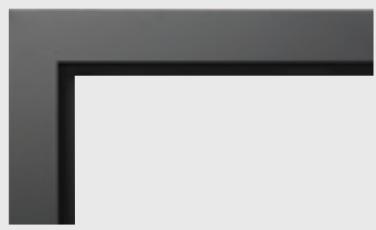

Black

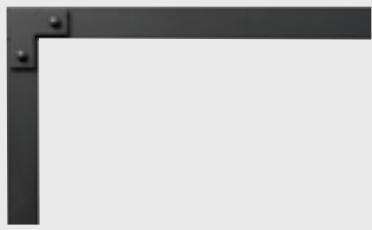

DD1

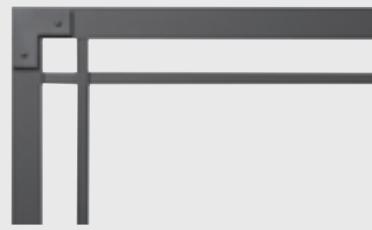

DD2



DD3

DESIGNER DOORS (FOR BENTLEY 39 / 42 / 48)


Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48D Driftwood Log Set, MQZCV48GT Glass Tray, MQSTONE10 Decorative Stone, MQZCV48RLF Fluted Brick Liner.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: These Models are certified to ANSI Z21.88-2017 CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.



Look for the EnerGuide
Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P4.1-15

FOR CALIFORNIA RESIDENTS ONLY:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.



LIMITED LIFETIME WARRANTY

2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
B106 - 12/2025