



# NÔRDIK SERIES

GAS 48DV, 41DV & 36DV




Nordik 36DV with black glass panels, a full rectangle screen front and a Komfort Zone Kit

KOZY  HEAT  
FIREPLACES



Nordik 48DV with black brick refractory and an arched mission screen front in vintage bronze

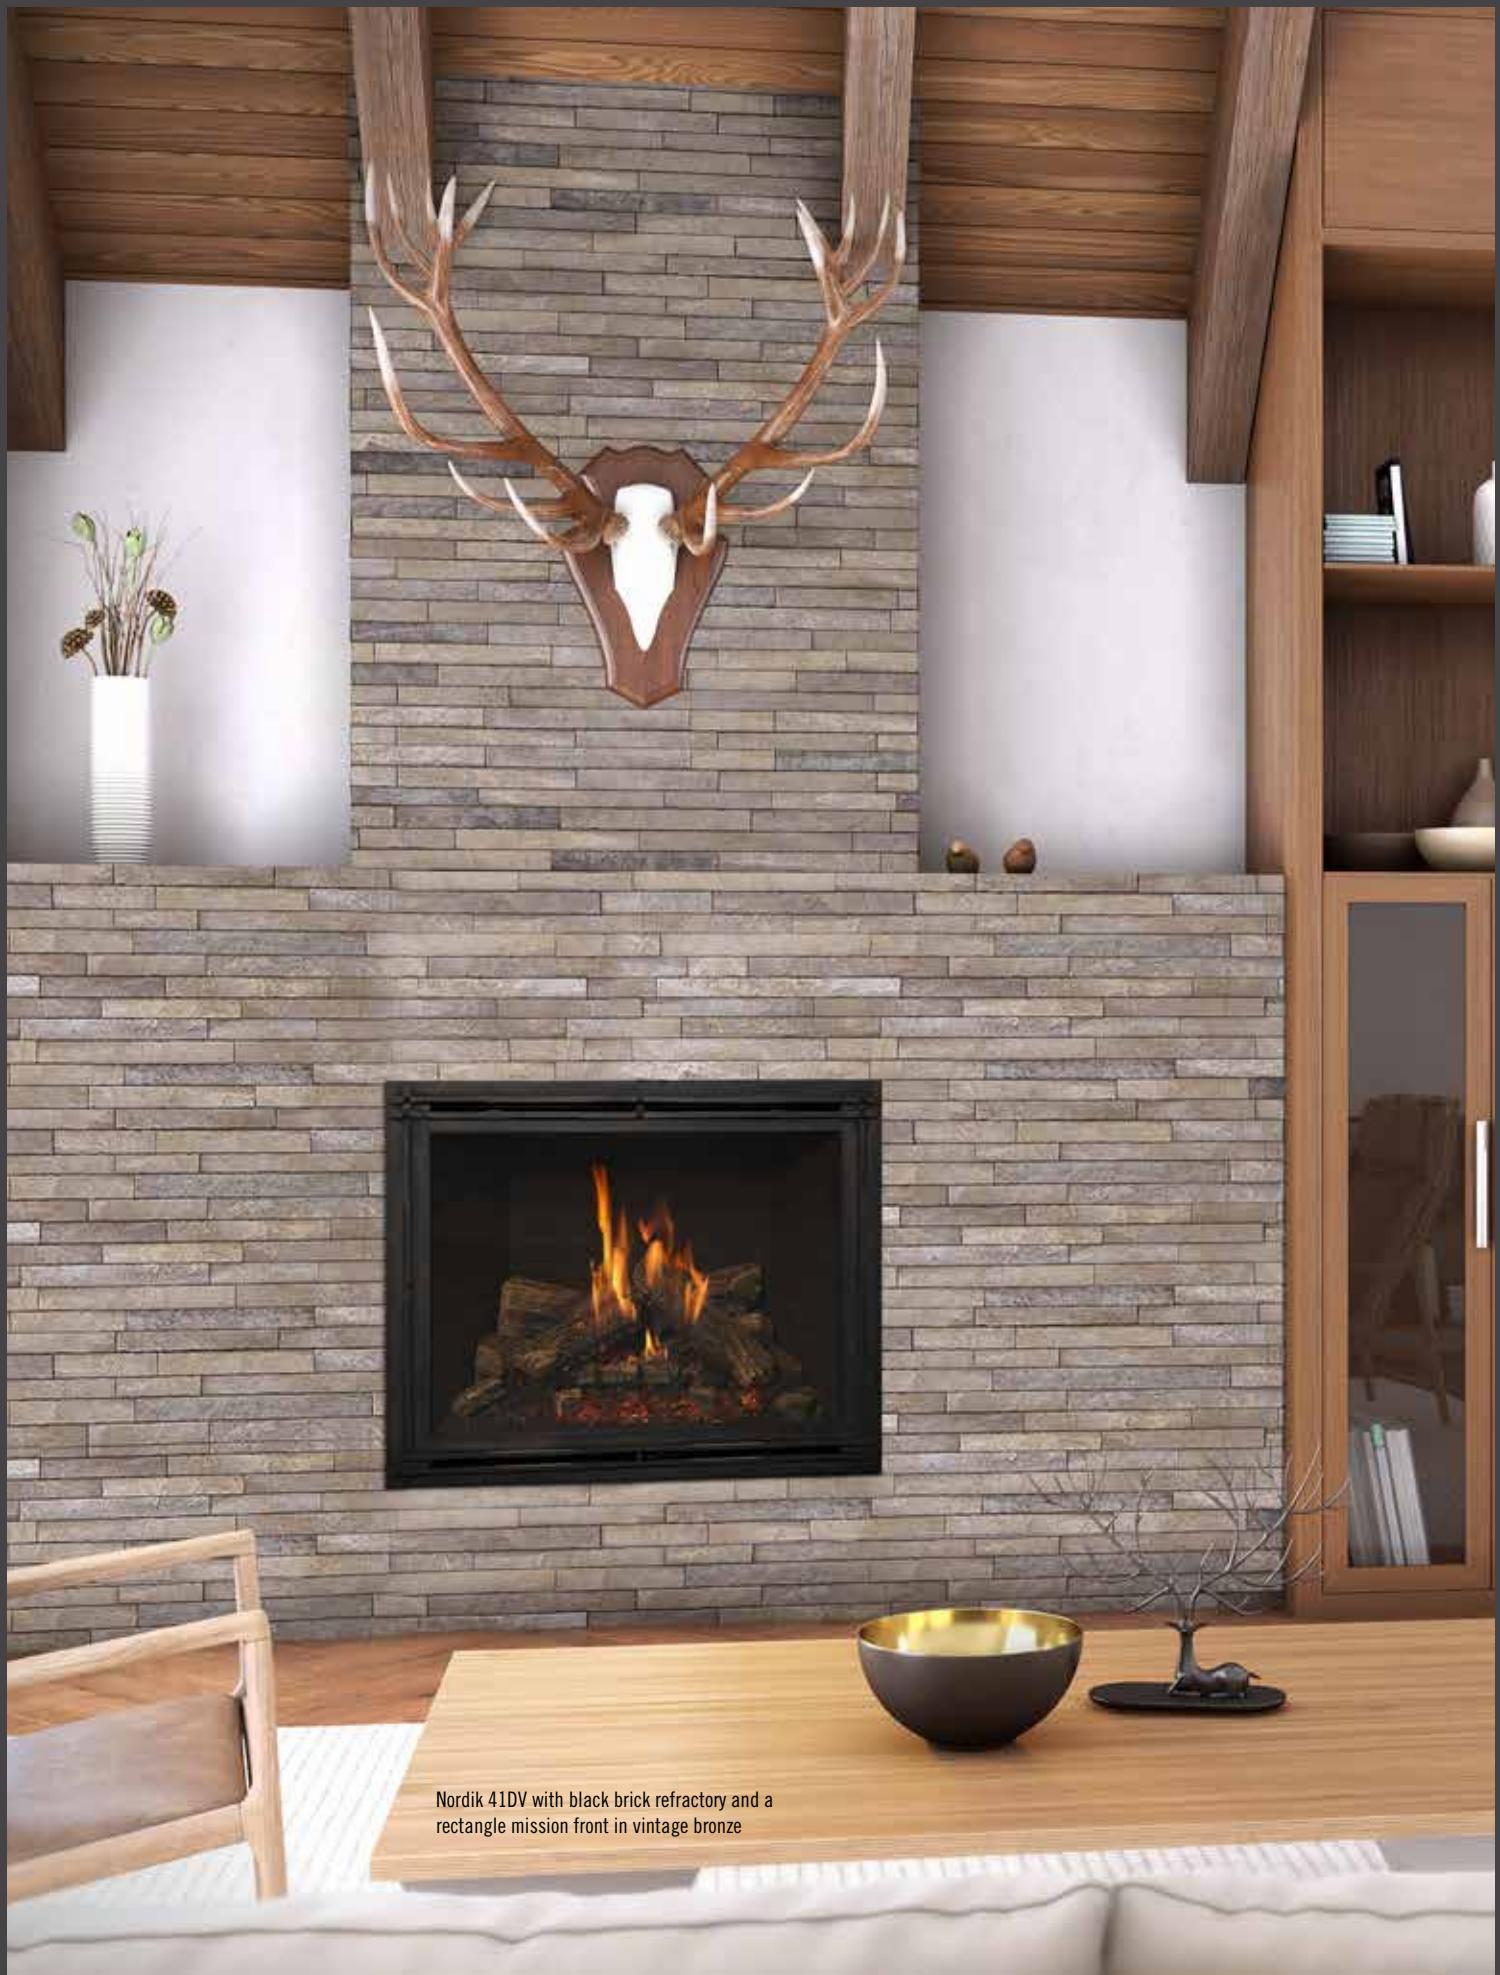

Nordik 41DV with black brick refractory and a rectangle mission front in vintage bronze



Nordik 36DV with black glass panel  
refractory, and a prairie vented screen front

# NÖRDIK SERIES

## Refractory/Panel Options



Black Glass with Birch Logs



Ledgestone with Traditional Logs



Herringbone with Traditional Logs



Chicago Brick with Birch Logs



Black Brick with Traditional Logs

### Remote Control Option

 **KOMFORT KONTROL**™

#### Remote control features:

	Thermostat function		Top Light Kit: Modulation
	Flame height modulation		Ember Bed: On/Off
	Fan speed modulation		IPI to continuous pilot

# NÔRDIK SERIES

## Nordik 48DV, 41DV & 36DV Fronts

Nordik 48DV measurements for all fronts are 49" x 41-1/4"

Nordik 41DV measurements for all fronts are 41-3/8" x 34-3/4"

Nordik 36DV measurements for all fronts are 36-3/8" x 32-1/4"



Mission Screen Front in Vintage Bronze



Arched Mission Screen Front in Vintage Bronze



Prairie Screen Vented Front in Black



Rectangle Screen Vented Front in Black



Prairie Screen Front in Black

*Approved for the Komfort Zone Kit Installations Only*



Full Rectangle Screen Front in Black

*Comes in Black, Brushed Stainless, or Antique Copper*

*Approved for the Komfort Zone Kit Installations Only*

# NÖRDIK SERIES

## Specifications

Model	Nordik 48DV	Nordik 41DV	Nordik 36DV
<b>Height</b>	41"	34-1/2"	32"
<b>Width</b>	47-5/8"	40-3/4"	35-3/4"
<b>Back Width</b>	33-1/4"	27-1/4"	22-1/4"
<b>Depth</b>	21-3/8"	20"	19-1/2"
<b>Weight</b>	315 lbs	235 lbs	215 lbs
<b>Viewing Area</b>	44-1/2" x 35-3/8"	37-5/8" x 29-3/8"	32-5/8" x 26-7/8"
<b>BTU NG High / Low</b>	48,000 / 32,000	40,000 / 22,000	35,000 / 18,000
<b>BTU LP High / Low</b>	48,000 / 39,000	40,000 / 21,000	35,000 / 18,000
<b>ENERGUIDE P4 NG / LP</b>	74.07% / 71.26%	70.84% / 70.94%	70.41% / 71.57%
<b>Steady State NG / LP</b>	74.23% / 71.29%	72.37% / 71.59%	71.12% / 74.02%
<b>AFUE % NG / LP</b>	75.05% / 72.31%	72.00% / 72.27%	71.71% / 72.99%
<b>Valve System</b>	IPI	IPI	IPI
<b>Fan Kit</b>	Included	Included	Included
<b>Top Light Kit</b>	Included	Included	Included
<b>Ember Bed Light Kit</b>	Included	Included	Included
<b>Screen Front</b>	Required	Required	Required
<b>Required Media</b>	Traditional Logs or Birch Log	Traditional Logs or Birch Log	Traditional Logs or Birch Log
<b>Horizontal Power Vent</b>	Optional	Optional	Optional

Features, Options & Specifications are subject to change.

Each unit factory tested

Certified to ANSI Z21.88 Vented Gas Heaters

## Heat Management Options

Model	Nordik 48DV	Nordik 41DV	Nordik 36DV
Komfort Zone Kit*	Optional	Optional	Optional

\*Front Plenum only. No Side Plenum. (Nordik 48DV)

## Clearances | Without Komfort Zone Kit

Model	Nordik 48DV	Nordik 41DV	Nordik 36DV
Minimum height of the fireplace enclosure	80"	76"	72"
Base of the fireplace to ceiling	80"	76"	72"
Fireplace top to ceiling	39"	41-1/2"	40"
Fireplace from stand off brackets	0"	0"	0"
From fireplace corners	1"	1/2"	1/2"
From fireplace front	36"	36"	36"
Fireplace sides to adjacent sidewall	1"	3/4"	3/4"
Fireplace top to 3/4" mantel trim	9"	6-1/2"	8"
Mantel 6" deep from fireplace top	12-1/2"	10"	11-1/2"

## Clearances | With Komfort Zone Kit

Model	Nordik 48DV	Nordik 41DV	Nordik 36DV
Mantel 6" deep from fireplace finishing edge:	0"	0"	0"
Mantel 6" deep from fireplace enclosure floor:	41-3/4"	34-1/2"	32"

Refer to the installation manuals for complete installation & venting requirements.  
See additional mantel clearance configurations in the installation manual.

## Vent System Approval & Requirements

- BDM™
- American Metal™ Products (Amerivent)
- Metal Fab™
- Olympia™
- ICC™
- Simpson Dura-Vent™
- Selkirk

**Elbows:** For each additional 90° elbow used after the first elbow, 3' must be subtracted from the maximum venting allowed. For each additional 45° elbow used after the first elbow, 1½' must be subtracted from the maximum venting allowed.

Note: (2) 45° elbows = (1) 90° elbow.

### Nordik 36DV

Approved 4 x 6 venting standard  
Approved for Class A / Masonry Chimney conversion kits  
Approved for coaxial to colinear 3 x 3 venting

### Nordik 41DV

Approved 5 x 8 venting standard  
Reduces down 4 x 6-5/8  
Approved for Class A / Masonry Chimney conversion

### Nordik 48DV

Approved 5 x 8 venting standard  
Reduces down 4 x 6-5/8  
Approved for Class A / Masonry Chimney conversion

### Horizontal Terminations

#### 36DV

**Minimum:** 12" vertical vent pipe + 90° horizontal elbow + termination cap  
**Maximum:** 25' maximum vertical + 90° horizontal elbow + 25' maximum horizontal + termination cap.

#### 41DV

**Minimum:** 12" vertical vent pipe + 6" vertical vent pipe + 90° horizontal elbow + termination cap  
**Maximum:** 25' vertical pipe + 90° elbow + 25' maximum horizontal + termination cap

#### 48DV

**Minimum:** 12" vertical vent pipe + 90° horizontal elbow + termination cap  
**Maximum:** 25' maximum vertical + 90° horizontal elbow + 25' maximum horizontal + termination cap.

### Vertical Terminations

Minimum: 3' + vent cap  
Maximum: 50' + vent cap

## Burn Videos



Nordik 48DV Birch



Nordik 48DV Log



Nordik 41DV




Nordik 36DV

# NÔRDIK SERIES


## Specifications

Fireplace brochures are for advertising purposes only.  
Refer to the specific fireplace manual for installation.


### Nordik 48DV

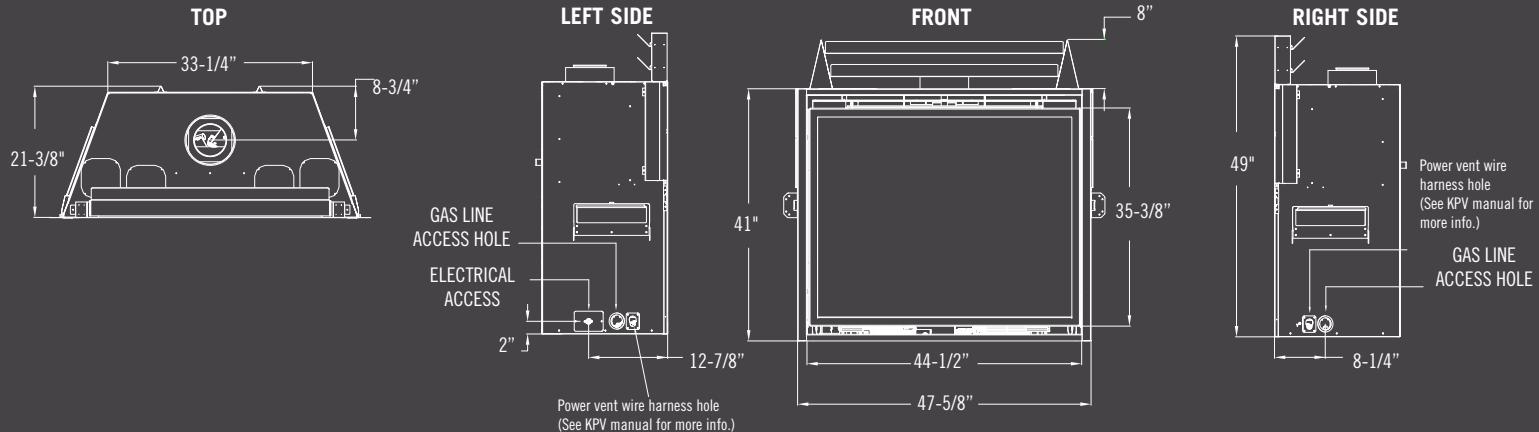

### Nordik 41DV

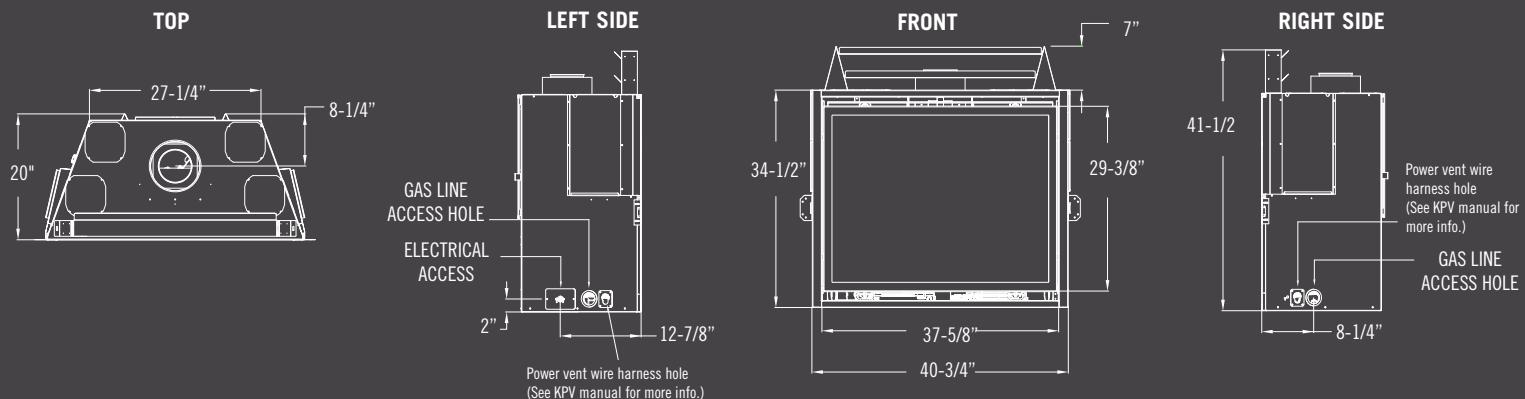

### Nordik 36DV

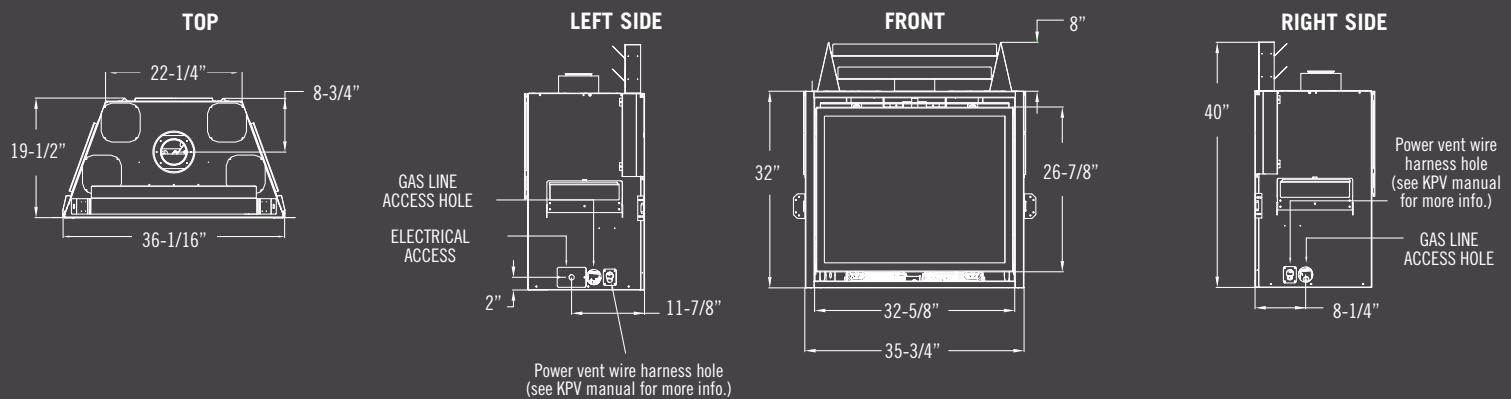

**KOZY**  **HEAT**  
FIREPLACES

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.

Manufactured by Hussong Mfg. Co., Inc.  
204 Industrial Park Road, Lakefield, MN 56150  
Phone 1-800-253-4904 [www.kozyheat.com](http://www.kozyheat.com) 5-25



Product Line:

For complete information on the Kozy Heat product line, please contact us at:

**FOR CALIFORNIA RESIDENTS ONLY**

**⚠ California Proposition 65 Warning**

**WARNING:** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

